

1/8" LOCK HASP
WELDED TO BOLLARD, IF
REQUIRED BY FACILITIES
MANAGEMENT FOR CHAINING

4" WELD-ON BUTT END CAP

SPOT WELDS SPACED @ 90 (GRIND
WELDS SMOOTH AND FLUSH WITH
PIPE SURFACE)

WIDE WHITE REFLECTIVE TAPE

4" I.D. GALVANIZED STEEL PIPE


PAVING OR TURF

IN BRICK PAVING, TOP OF
FOOTING SHALL BE FLUSH
WITH TOP OF CONCRETE SLAB.

IN TURF AREAS TOP OF
FOOTING SHALL BE SET
FLUSH WITH FINISHED GRADE.

IN ASPHALT PAVING, TOP OF
FOOTING SHALL BE FLUSH WITH
TOP OF AGGREGATE BASE.

CONCRETE FOOTING

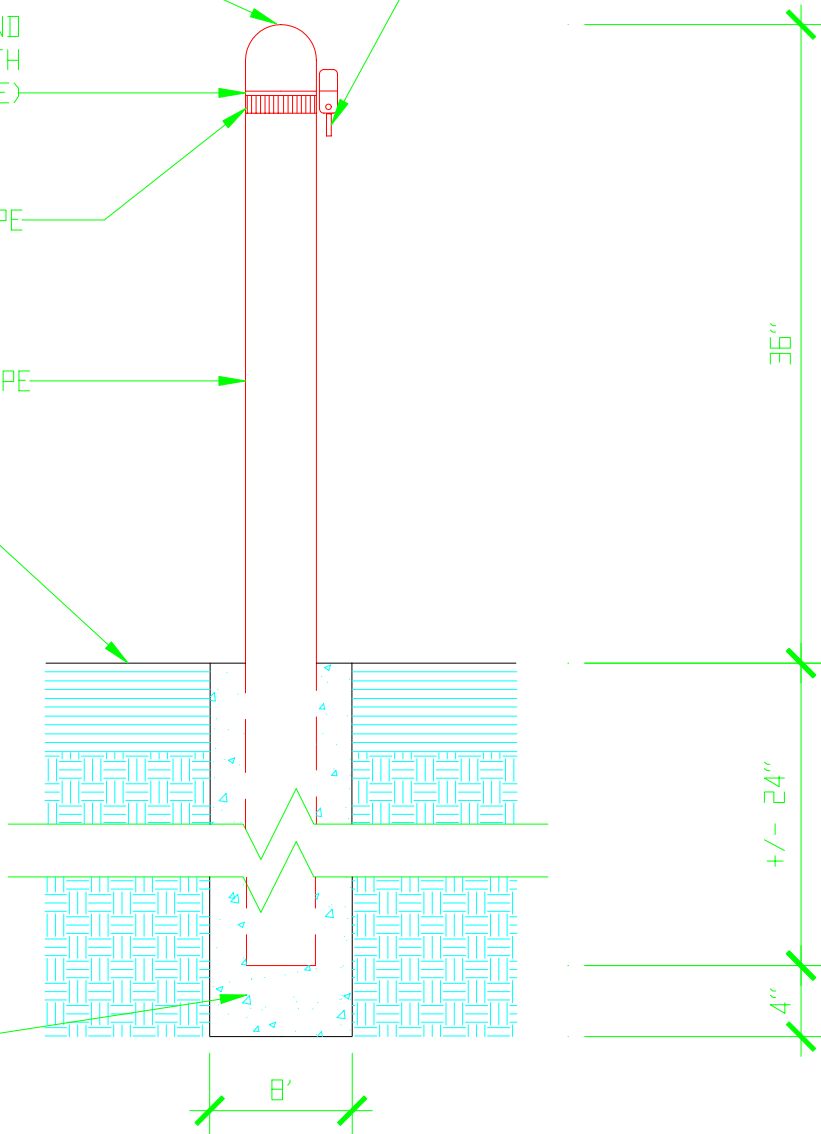

PAINT SHALL MATCH SHERWIN WILLIAMS
#94341, ROOKWOOD SHUTTER GREEN;
OIL BASE WITH A GLOSS FINISH. ETCH
OR
PICKLE PIPE PRIOR TO PAINTING ZINC
CHROMATE OR A GALVALIZED METAL
LATEX PRIMER SHALL BE USED AS A
FIRST COAT.

SECTION

1"=1'

METAL BOLLARD 2